Chemical protective clothing of Category III

This garment complies with the requirements of referenced standard

Fach coverall is identified by an inside and an outside label. The inner label indicates the protective class as defined in the Regulation. It also gives other relevant information of use to the enduser. The outer label identifies the type of garment.

- Fabric type or Brand Style number or Model identification
- Style number or Model identification Products comply with the requirements for Category III PPE according to European Regulation (EU) 2016/425. The EU Type examination (Module B) was issued by SGS UK, Rossmore Industrial Estate, Inward Way, Ellesmere Port CH65 3EN, UK (N.B. 0120). The conformity to quality assurance of production process certificates (Module D) was under the surveillance by SGS UK, Rossmore Industrial Estate, Inward Way, Ellesmere Port CH65 3EN, UK (N.B. 0120)
- Type 5 Particle Tight Clothing Type 6 Limited Splash Tight Clothing EN ISO 13982-1:2004 + A1:2010 EN 13034:2005 + A1:2009

 This pictogramme shows that the suit is for protection against chemicals

- Inis pictogramme shows that the suit is for protection against chemicals

 ULTITEC 2000 coveralls are antistatically treated and comply to the electrostatic protection required by EN1149-5:2018 on inner face only, and must be used with compatible accessories and work practices to be effective (see note below)

 This pictogramme and triangle indicate radioactive protection to EN 1073-2:2002 excluding clause
 4.2 puncture resistance and resistance to blocking
 The letter's after Type number indicates that fabric used in this coverall has been tested and passed to EN14126:2003 protection against infective agents

 Enformation:

 Size

 M
 L

 XL

 XL

 XXL

 XXL

 AXL

 AXL

 Size Chose in the second of the sec Size Information: Please choose the appropriate size Wearer should read these instructions Care Pictogrammes: Do not wash, Do not machine dry, Do not iron, Do not dry clean

- Do not reuse
- Date of manufacture
- Additional Warning: Flammable material. Keep away from fire

Compliance and Responsibility:

In order to fully meet the performance claims for Types 5/6 and EN 1073-2 garments, all opening such as wrists, ankles, neck to hood (collared style), face to mask, and including the zipper flap should be securely taped. The user shall be sole judge of the suitability for the type of protection required, and the correct combinations of coveralls accessories and ancillary equipment. To obtain full protection all apertures should be securely closed, but the user shall determine, and allow for the effect of heat when in use. Heat stress and discomfort can be reduced or eliminated by the use of appropriate undergarments of ventilation equipment. The manufacturer is not responsible for accidents caused by improper behavior or inappropriate selection of protective clothing or ancillary equipment.

Limitations:

Exposure to certain chemicals or high concentrations or pressures, may require higher barrier properties of the fabric, or in the construction of the suit. Such conditions can be protected by garments made to the standards of Types1 to 4 or possibly by a more protective material. Footwear appropriate to the intended use must be worn, especially where boots (or socks) are attached. The integral boot is to be worn inside the appropriate footwear, and the aperture at the top of the footwear taped to the leg of the coverall

Garment Removal: Care should be taken with the removal of any garment which may have been contaminated. The use of an assistant wearing PPE should be used to peel back the garment from the wearer, taking care that no contaminant comes into contact with either the assistant or the wearer.

Areas of Use:

These coveralls are designed for protection against hazardous substances and contamination of both product and personnel. They are typically used, dependent upon the severity of the toxicity and the conditions, for protection against airborne particles and limited splash and spray. The performance requirements applicable to this chemical protective clothing garment are covered by the standards listed above where there is a need for resistance to penetration by airborne solid particles including radioactive materials. In addition it is intended for use in cases of potential exposure to light spray liquid aerosols or low pressure volume splashes where a complete permeation barrier is not required.

Electrostatic Warnings:

Both the electrostatic dissipative clothing and the person wearing it shall be properly earthed. The resistance between the person and the earth shall be <10⁸ ohms e.g. by wearing adequate footwear on dissipative or conductive floors

Electrostatic dissipative clothing shall not be opened or removed whilst in the presence of flammable or

explosive atmospheres or while handling flammable or explosive substances. Electrostatic dissipative clothing is intended to be worn in Zones 1, 2, 20, 21 & 22. (see EN 60079-10-1[7] and EN 60079-10-2[8]) in which the minimum ignition energy of any explosive of atmosphere is not less than 0.016mJ. Electrostatic dissipative clothing shall not be used in oxygen enriched atmospheres or in

zone 0 without the prior approval of the responsible safety engineer (see EN 60079-10-1[7]). The electrostatic dissipative performance of the electrostatic dissipative protective clothing can be

affected by wear and tear, laundering and possible contamination.
Electrostatic dissipative protective clothing shall permanently cover all noncomplying materials during normal use. Including the zipper flap must be permanently and appropriately sealed. (including bending

Storage and Disposal:

The garments should be stored in accordance with normal storage practice, preferably in the dark with no UV light exposure and disposed harmlessly to the environment. The inert polymers used ensure a long shelf life but it is recommended that items should be replaced after 5 years as the antistatic properties may reduce with age. Restrictions on the disposal depend solely on the contamination during use. If in doubt please contact your supplier. The manufacturer cannot accept responsibility for any improper use or disposal of garments produced by them.


PERFORMANCE CHART OF ULTITEC 2000

EARDIC DHYSICAL DRODEDTIES

BASED IN CLASSIFICATION IN EN 14325:2018			TEST METHOD		RESULT		CLASS
Abrasion Resistance			EN ISO 129	947	>100 cycles*		Class 2
Flex Cracking Resistance			EN ISO 785	4-B	>50,000 cycles*		Class 6
Trapezoidal Tear Resist.		MD CD	EN ISO 9073-4		>40N >20N		Class 2
		MD CD	EN ISO 13934-1		>100N >30N		Class 1
Puncture Resistance			EN 863		>10N		Class 2
Seam Strength			EN ISO 13935-2		>75N		Class 3
Antistaticity		EN 1149-5		Pass (EN 1149-3)			
pH Value			EN ISO 3071		Pass		
Resistance to Ignition			EN 13274-4		Pass		
Note * denotes visual endpoint							
RESISTANCE TO REPELLENCY AND PENETRATION BASED IN CLASSIFICATION IN EN 14325:2018			TEST METH	HOD PENETRATIO		NC	REPELLENCY
Sulphuric Acid 30%			EN ISO 65	30	Class 3		Class 3
Sodium Hydroxide 10%		EN ISO 6530		Class 3		Class 3	
FABRIC PERFORMANCE AGAINST INFECTIVE AGENTS IN EN 14126:2003							
ISO 16603:2004	ISO 16604:2004	ISO/DI	IS 22611:2003			ISO	22610:2006
Class 6	Class 6		Class 3		Class 3		Class 6
WHOLE SUIT TEST PERFORMANCE							
Type 5 EN ISO 13982-1:2004 Inward Leakage Test Test method: EN ISO 13982-2:2004 pass = Ljmn.82/90≦30% and LS.8/10≦15%							Pass
Type 6 EN 13034:2005 Low Level Spray Test Test method: EN ISO 17491-4:2008 Method:A							Pass
Protective clothing against radioactive materials Test method: EN 1073-2:2002 excluding clause 4.2 and resistance to blocking (not tested)							Class 1

A DECLARATION OF CONFORMITY PREPARED AND SIGNED BY THE MANUFACTURER CAN BE ACCESSED ON THE MANUFACTURER'S WEBSITE



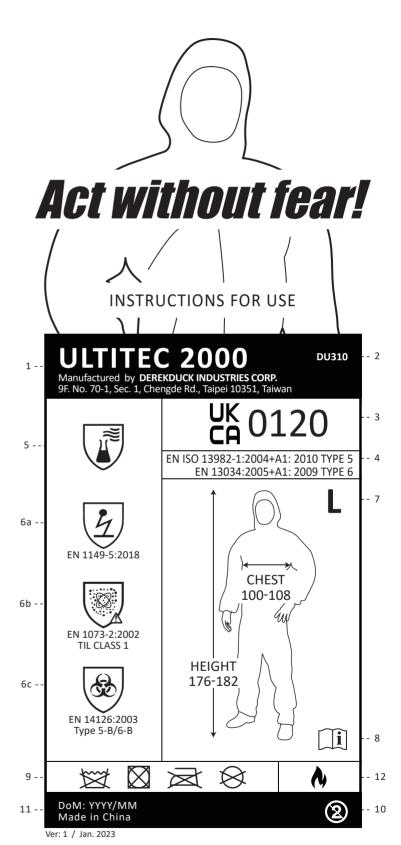

DEREKDUCK INDUSTRIES CORP.

9F. No. 70-1, Sec. 1, Chengde Rd., Taipei 10351, Taiwan

+886-2-2550-2236 derekduck@derekduck.com





м ultitec-protection.com